

PD17B POWER INDUCTORS FOR DIGITAL AMPLIFIER 数字功放电感

Features

- The optimal design realizes high quality sound and low distortion.
 高品质、低失真最佳设计
- Small compact, and DIP type.
 小体积，直插类型
- Low radiation noise by magnetically shielded construction
 闭合磁路封装，低辐射
- High current, Low resistance.
 大电流，低电阻
- Operating temperature : -40°C~+125°C.
 工作温度：-40°C~+125°C



Applications

- Suitable as choke for digital amp. Car audio, LCD and PDP TV, 5.1ch Home theater, etc.
 适用于数字功放扼流。如汽车音响， LCD 电视和 PDP 电视， 5.1 声道家庭影院等

Electrical characteristics

Part number 料号	Inductance 电感量 μH	DC resistance 直流电阻 mΩ max. (typ.)	DC saturation current 直流饱和电流 A max.(typ.)			Temperature rise current 温升电流 A max.	
			ΔL ≤ 10%	ΔL ≤ 20%	ΔL ≤ 30%	ΔT ≤ 20°C	ΔT ≤ 40°C
			PD17B-103	10 ± 10%	18.0(15.7)	16.0(17.0)	23.8(25.0)
PD17B-153	15 ± 10%	18.0(15.7)	12.8(14.0)	17.5(20.0)	20.3(22.0)	5.0	6.5
PD17B-223	22 ± 10%	18.0(15.7)	9.5(11.0)	13.0(14.0)	15.2(16.0)	5.0	6.5
PD17B-333	33 ± 10%	18.0(15.7)	5.5(6.5)	6.9(8.0)	8.2(9.0)	5.0	6.5


Remark

- Inductance is measured with a LCR meter 4284A or equivalent.
 Test frequency at 100kHz
- DC resistance is measured with 16502 Milliohm Meter , or equivalent.
 Reference ambient temperature 25°C

备注

- 电感量测试采用 4284A 数字电桥或同等仪器；
 测试频率 100KHz
- 直流电阻测试采用 16502 毫欧表或同等仪器；
 环境温度 25°C

Dimensions

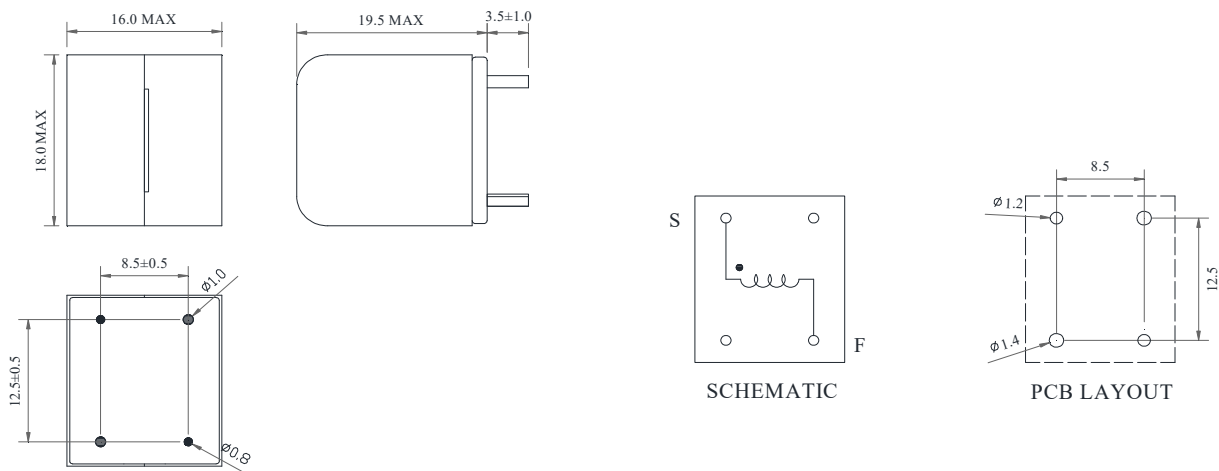

Powerhen Electronic Co.,Ltd

Addr: Floor 3, Building 2, Shenliang Automotive Electronic Industrial Park, Guanlan Town, Shenzhen
Tel:0755-23570008 Fax:0755-28088656 E-Mail:sales@powerhen.com

*The specifications of the data measured in the laboratory, differen conditions of use, please refer to the actual.
*The specifications are subject to change, without prior notice.
*Without approval, this product can not be used for medical militair or other high-risk areas

Electrical Characteristic Curve

