


■PH26A

Features

- Using flat wire, and SMD type. 采用扁平线，贴片类型
- Low radiation noise by magnetically shielded construction
闭合磁路封装，低辐射
- High current, Low resistance. 大电流，低电阻
- Operating temperature: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$. 工作温度: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Tape and reel packaging: -40°C to $+80^{\circ}\text{C}$ 卷带包装: -40°C 至 $+80^{\circ}\text{C}$
- Resistance to soldering heat Max three 40 second reflows at $+260^{\circ}\text{C}$, parts cooled to room temperature between cycles
耐焊接热 最多三个 40 秒回流 $+260^{\circ}\text{C}$ ，部件在循环之间冷却至室温
- Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}\text{C}$ / 85% relative humidity)
湿气敏感度等级 (MSL) 1 (在 $<30^{\circ}\text{C}$ 时的无限车间寿命/ 85% 相对湿度)



Applications

- high efficiency DC/DC converters. 高效 DC/DC 转换器
- Single and polyphase buck converters. 单相、多相降压转换器
- Filter for audio applications. 音频滤波应用
- Optimized for high current boost applications. 大电流升压应用优化

Electrical characteristics

Part number	① Inductance μH $\pm 10\%$	② DC resistance $\text{m}\Omega$ typ max.		③ SRF typical MHz	④ Isat A typical			⑤ Irms A typical	
					10% drop	20% drop	30% drop	20°C rise	40°C rise
PH26A-332KL	3.3	2.35	2.6	40	91.0	92.5	93.6	22	30
PH26A-472KL	4.7	2.35	2.6	30	59.0	61.2	62.4	22	30
PH26A-682KL	6.8	2.35	2.6	25	42.0	45.0	45.9	22	30
PH26A-103KL	10	2.35	2.6	20	28.0	31.2	32.1	22	30
PH26A-153KL	15	2.35	2.6	16	18.0	21.2	21.9	22	30
PH26A-223KL	22	2.35	2.6	15	12.0	14.0	15.0	22	30
PH26A-333KL	33	2.35	2.6	10	7.0	8.7	9.6	22	30


Remark

- ① Inductance is measured with a LCR meter Agilent 4284A or equivalent.
Test frequency at 500kHz
- ② DC resistance is measured with Keithley 580 Milliohm Meter, or equivalent.
Reference ambient temperature 25°C
- ③ SRF measured using an Agilent 4395A network analyzer and an Agilent 16193A test fixture.
- ④ DC current at 25°C that causes the specified Inductance drop from its value without current.
- ⑤ Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- ⑥ Electrical specifications at 25°C



备注

- ① 电感量测试采用 Agilent 4284A 数字电桥或同等仪器；
测试频率 500KHz
- ② 直流电阻测试采用 Keithley 580 毫欧表或同等仪器；
环境温度 25°C
- ③ SRF 使用 Agilent 4395A 网络分析仪和 Agilent 16193A 测试夹具测量。
- ④ 直流电流在 25°C ，加载导致指定电感从没有电流的值下降。
- ⑤ 导致指定温度从 25°C 环境温度上升的电流。此信息仅供参考，不代表绝对最大额定值。
- ⑥ 25°C 时的电气规格

■ Dimensions (mm)

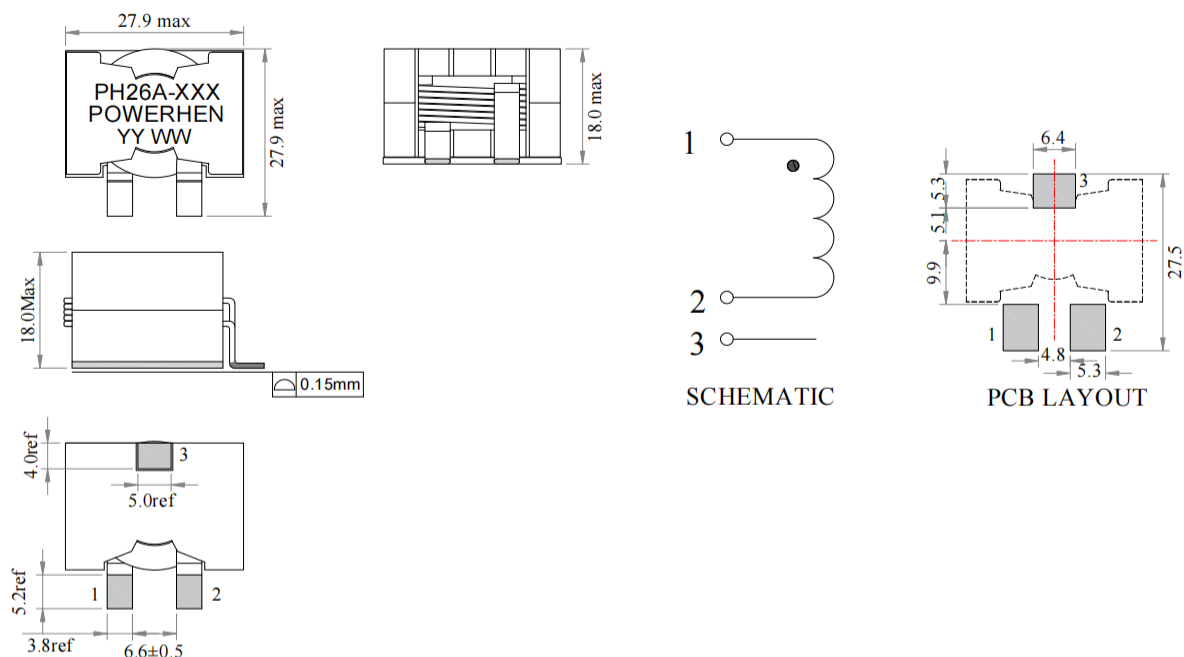


Electrical Characteristic Curve

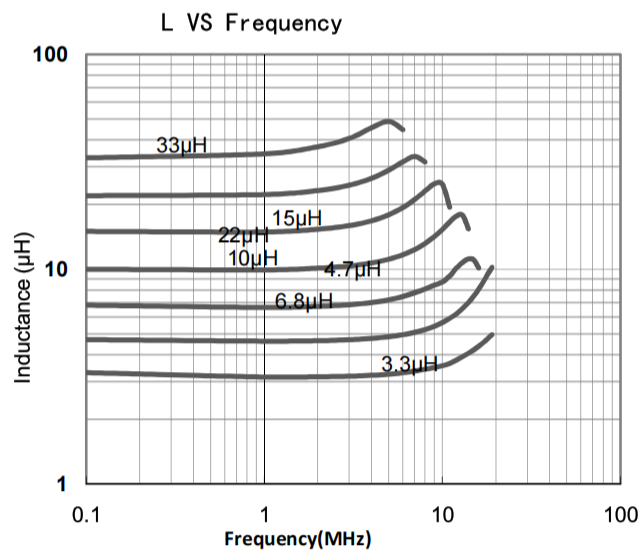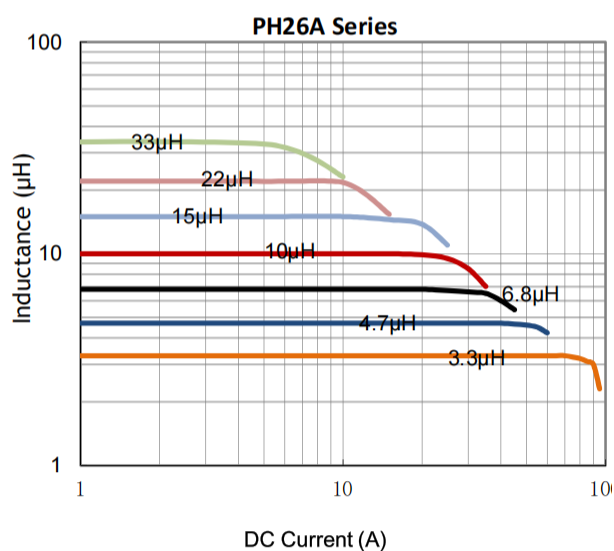

■ Packaging Specification - tray: [mm]

包装规格 - 托盘包装: [mm]

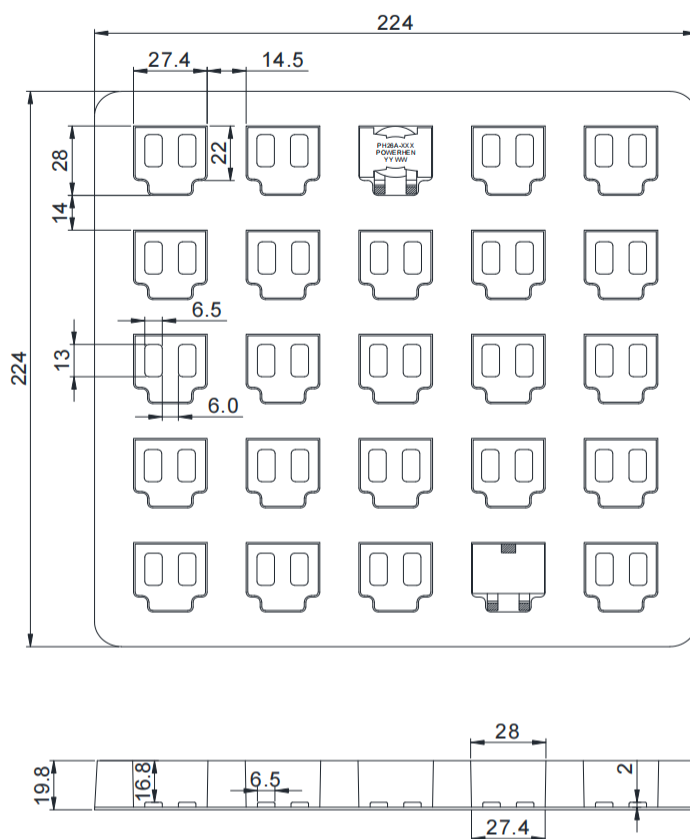

Weight 重量: 35.3g/PCS
Packaging 包装数量: 25 PCS/盘