

■ PD17A Series

Features 特点

- The optimal design realizes high quality sound and low distortion.
高音质、低失真最佳设计
- Compact size using flat wire, and DIP type.
扁平线小尺寸封装，直插类型
- Low radiation noise by magnetically shielded construction
闭合磁路封装，低辐射
- High current, Low resistance.
大电流，低电阻
- Operating temperature : -40°C~+125°C.
工作温度：-40°C~+125°C



Applications 应用

- Suitable as choke for digital amp. Car audio, LCD and PDP TV, 5.1ch Home theater, etc.
- 适用于数字功放扼流。如汽车音响，LCD 电视和 PDP 电视，5.1 声道家庭影院等

Electrical characteristics 电气特性

Part number 料号	Inductance ① 电感量 μH ±10%	DCR ② 直流电阻 mΩ		SRF ③ 自谐频率 MHz		Isat ④ 直流饱和电流 A typical			Irms ⑤ 温升电流 A typical	
		typ	max.	typical	10% drop	20% drop	30% drop	20°C rise	40°C rise	
PD17A-103KE	10	9.4	10.3	19	28.9	29.8	31.3	6.8	8.5	
PD17A-153KE	15	9.4	10.3	14	17	17.9	18.3	6.8	8.5	
PD17A-223KE	22	9.4	10.3	11	14	15	15.8	6.8	8.5	
PD17A-333KE	33	9.4	10.3	7	9.1	9.7	10.2	6.8	8.5	


Remark

- ① Inductance is measured with a LCR meter Agilent 4284A or equivalent.
Test frequency at 100kHz 1V
- ② DC resistance is measured with Keithley 580 Milliohm Meter, or equivalent.
Reference ambient temperature 25°C
- ③ SRF measured using an Agilent 4395A network analyzer and an Agilent 16193A test fixture.
- ④ DC current at 25°C that causes the specified Inductance drop from its value without current.
- ⑤ Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- ⑥ Electrical specifications at 25°C



备注

- ① 感量测试采用 Agilent 4284A 数字电桥或同等仪器；
测试频率 100KHz 1V
- ② 直流电阻测试采用 Keithley 580 毫欧表或同等仪器；
环境温度 25° C
- ③ SRF 使用 Agilent 4395A 网络分析仪和 Agilent 16193A 测试夹具
测量。
- ④ 直流电流在 25° C，加载导致指定电感从没有电流的值下降。
- ⑤ 导致指定温度从 25° C 环境温度上升的电流。此信息仅供参考，不代表绝对最大额定值。
- ⑥ 25° C 时的电气规格

Dimensions 结构尺寸

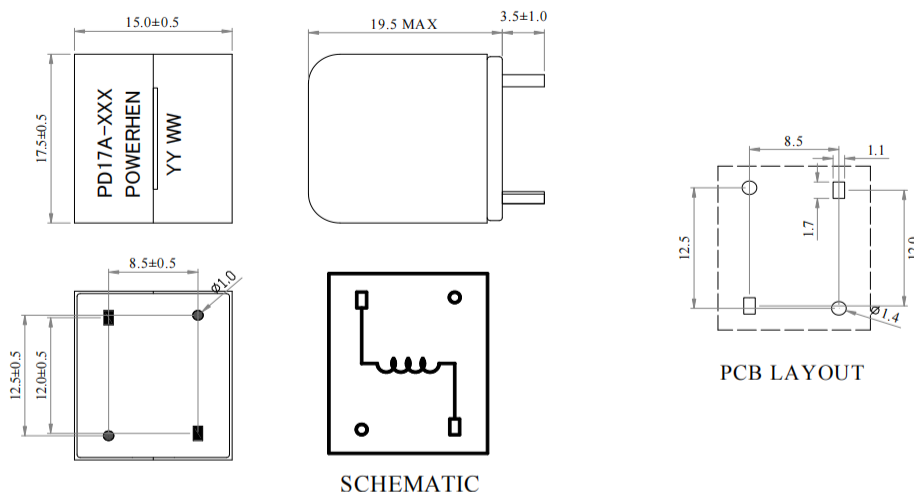


Electrical Characteristic Curve 电气特性曲线

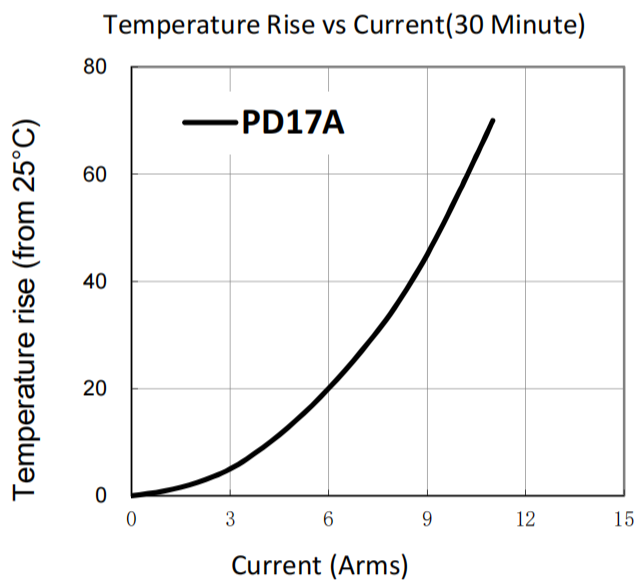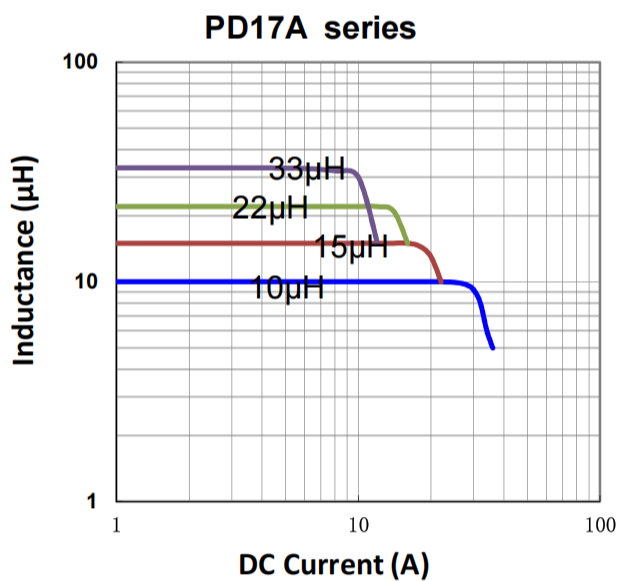

■ Packaging Specification - tray: [mm]

包装规格 - 托盘包装: [mm]

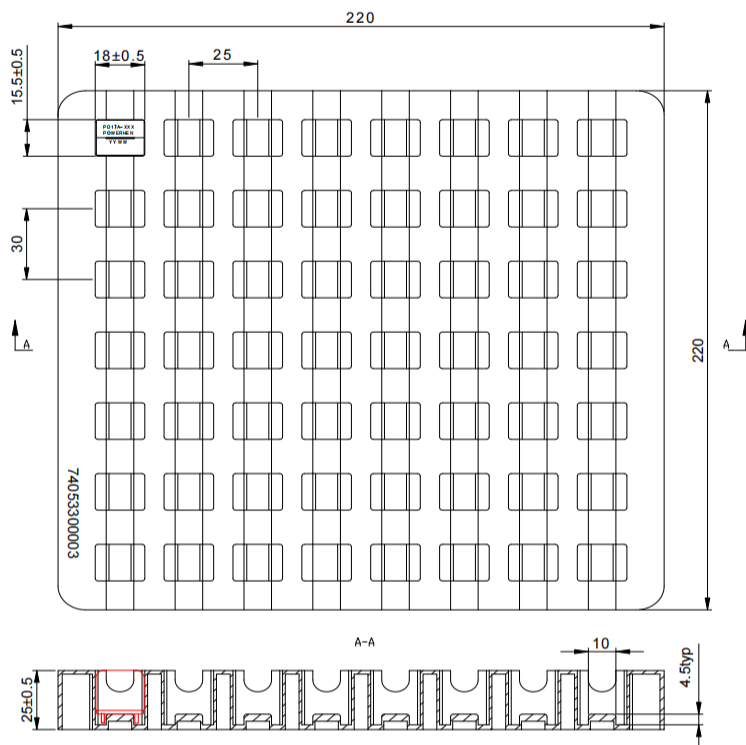

Weight 重量: 19.4~19.65g/PCS
 Packaging 包装数量: 56 PCS/盘